

Design Approval- **ALL CUSTOM DESIGNS ARE NON-CANCELLABLE AND NON-RETURNABLE.** This endorsed approval drawing must be received in order to release your order for production. Manufacturer reserves the right to alter design to current manufacturing standards. By signing, you certify your approval in the following areas:

- Overall Dimensions
- Material
- Construction and Design
- Hardware (fixtures, casters, accessories)
- Delivery Access (will it fit through doors)
- Facility Integration (rough in alignment, etc)





Approval Signature _____ Date: _____

Print Name and _____ Title _____

(Signature, Date, Printed Name & Title are all required)

NOTES:

1. FULLY WELDED 304 SERIES STAINLESS STEEL CONSTRUCTION
2. PRE-RINSE FAUCETS: GOOSE NECK WITH BUILT IN PRERINSE INLET - 1/2" NPSM MALE WITH COMPRESSION FITTINGS. OPERATING PRESSURE 20-125 PSI OPERATING TEMP RANGE 40-180° F
3. TREATED (DI) WATER: FLOW RATE 50 PSI - 120 PSI, RATE OPERATING PRESSURE: 20-125 PSI, RATED OPERATING TEMPERATURE: 40-140°F, 1/2" NPSM MALE INLET, OPTIONAL ADAPTER FOR 1/4" NPT MALE INLET (INCLUDED)
4. AIR INLET: TURRET BASE 3/8" NPT FEMALE INLET, SINGLE 3/8" NPT FEMALE OUTLET, 3/8" IPS MOUNTING SHANK WITH LOCKNUT AN WASHER. 3/8" PS X 2-1/2" OAL. LOW-PRESSURE BRASS THREADED PIPE FITTING 3/8 MALE X 1/4 FEM PIPE SIZE, HEX REDUCING BUSHING
5. SINK DRAIN: SINK OPENING DIAMETER 3-1/2", NPS: 1-1/2" FACE FLANGE DIAMETER: 4-1/2"
6. UTILITY REQUIEMENT: COLD WATER - 20 TO 50 PSIG 70°F MAX, HOT WATER - 20 TO 50 PSIG 120°F TO 140°F.
7. AIR GUN WITH STANDARD 5 TIP GUN & HOSE: CONNECTIONS ARE TO BE MADE PER LOCAL CODE & NOT TO EXCEED RECOMANDED 150 PSI, 1/4" NPTF INLET

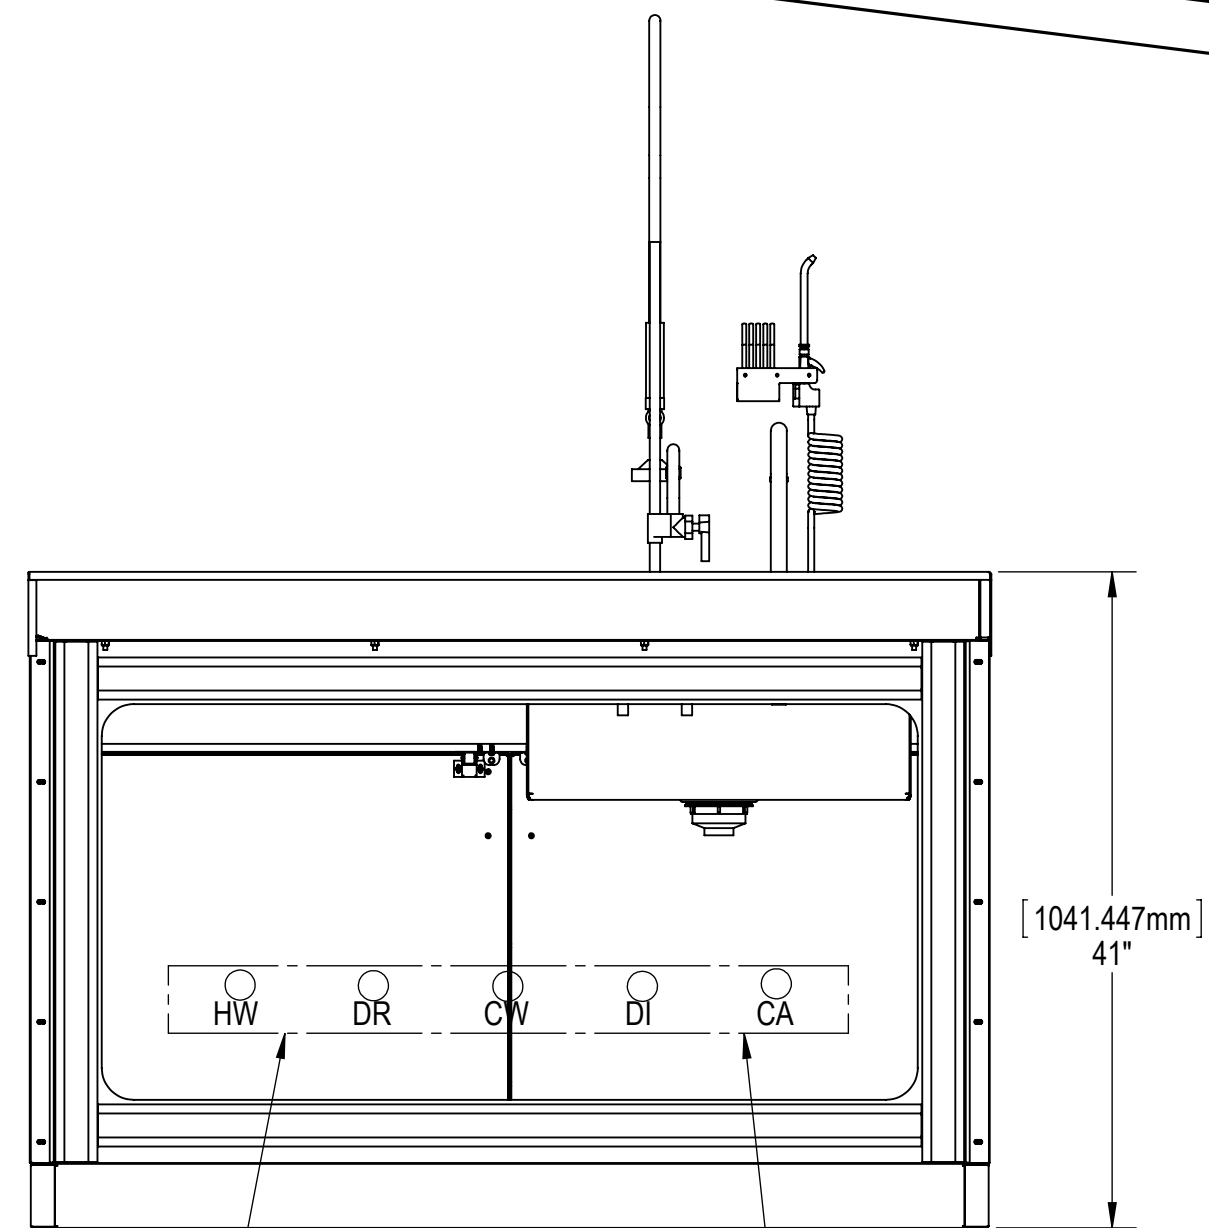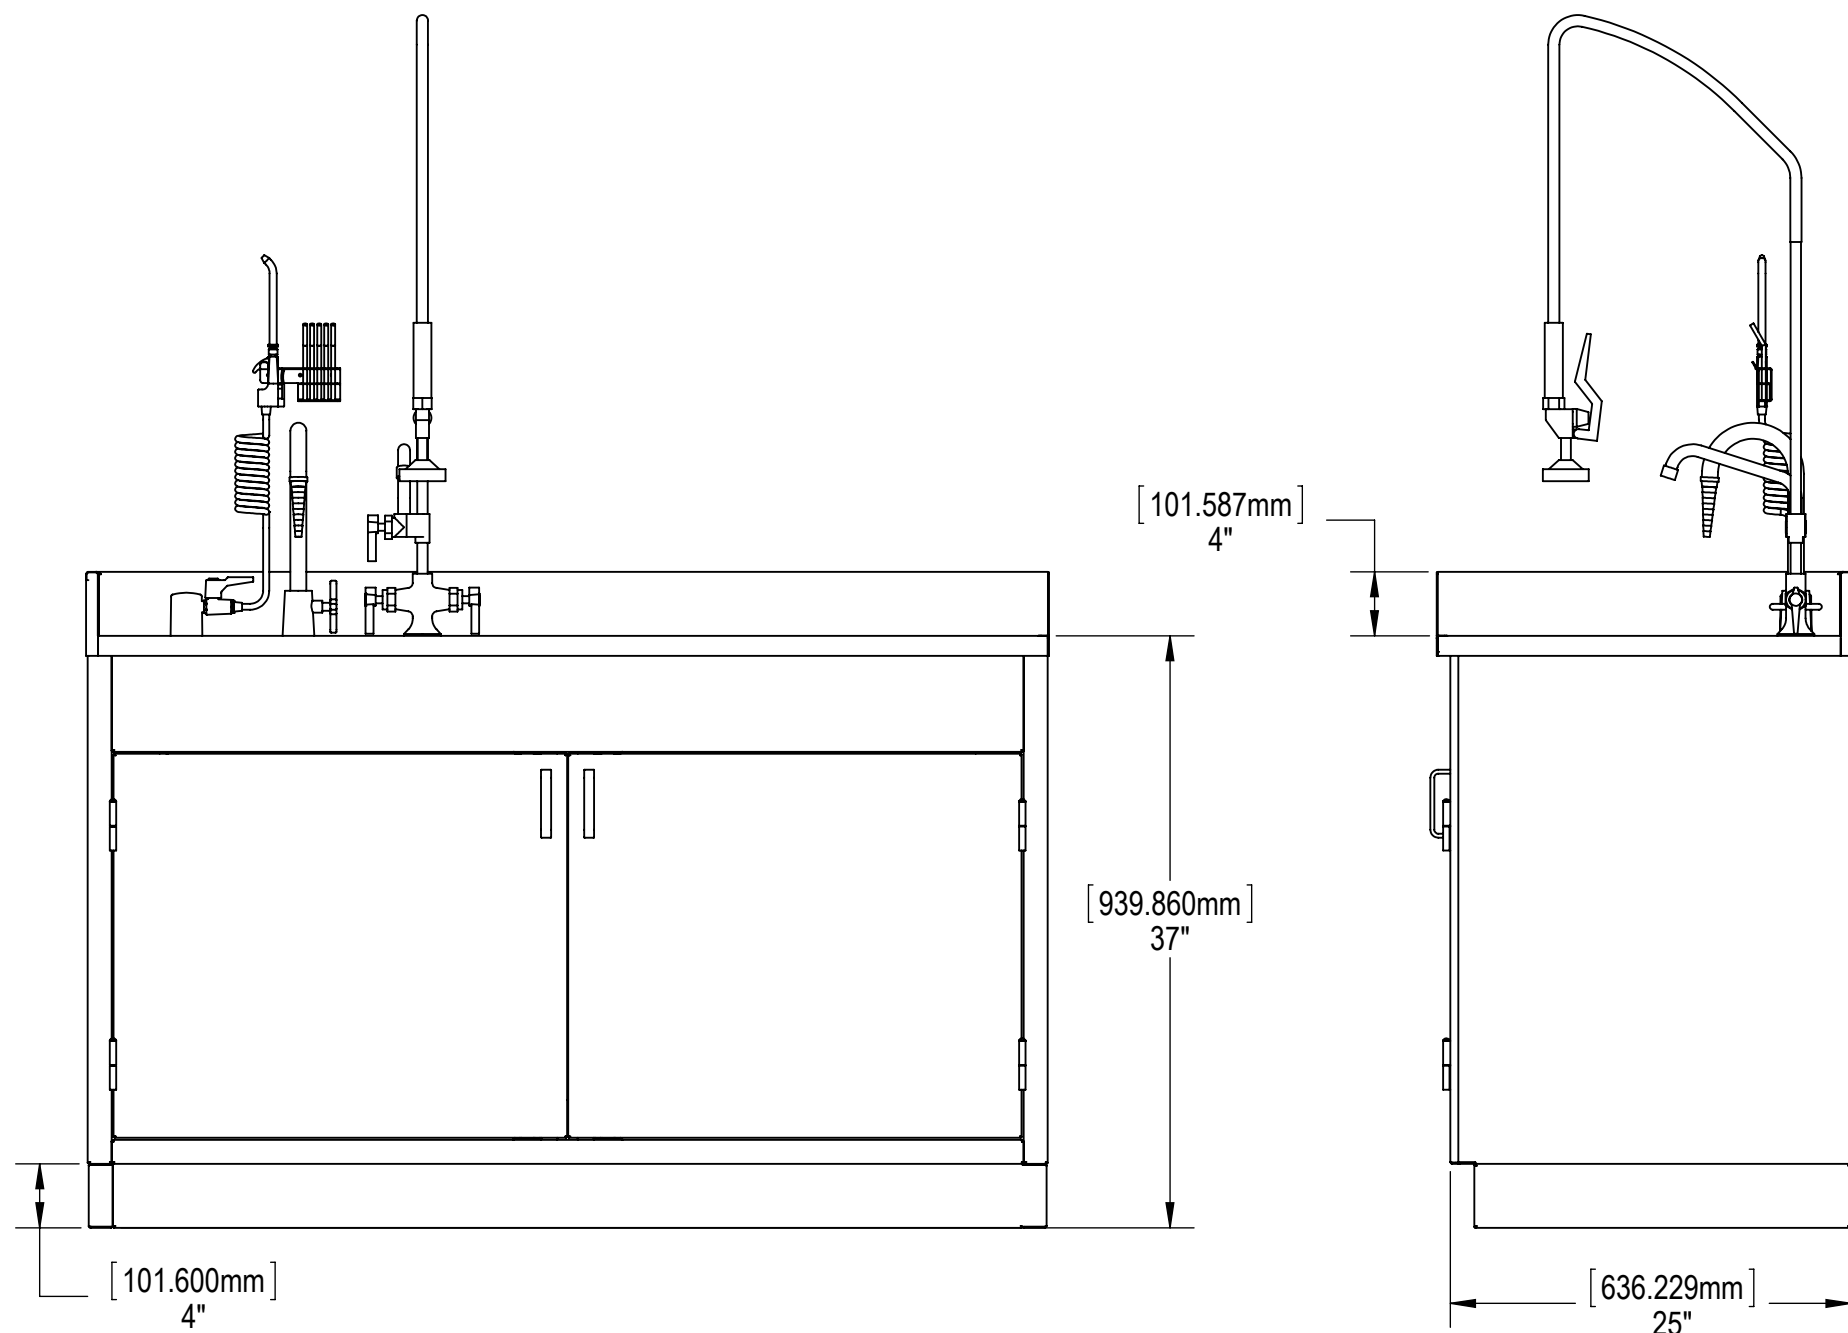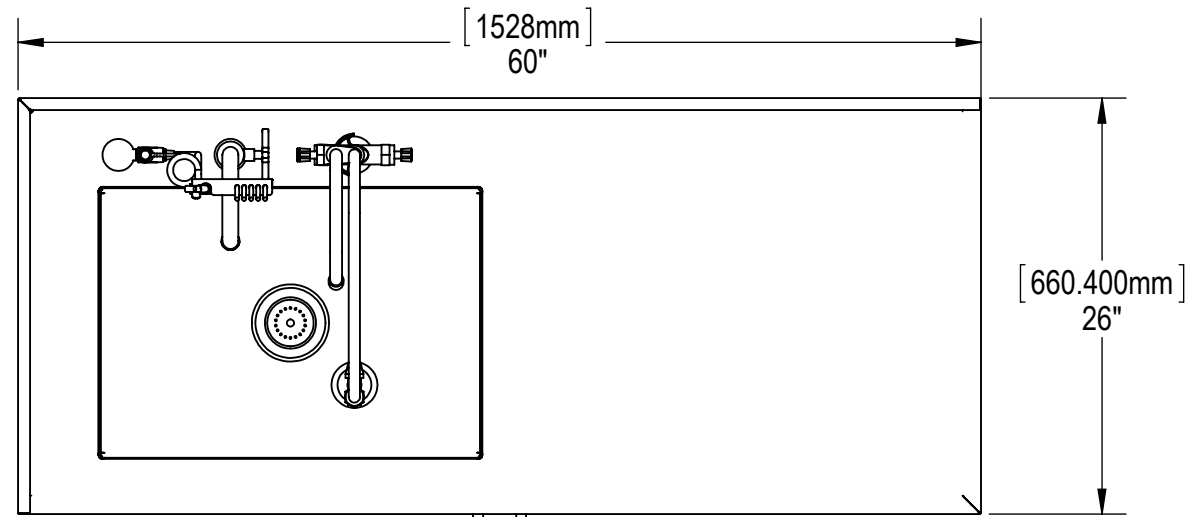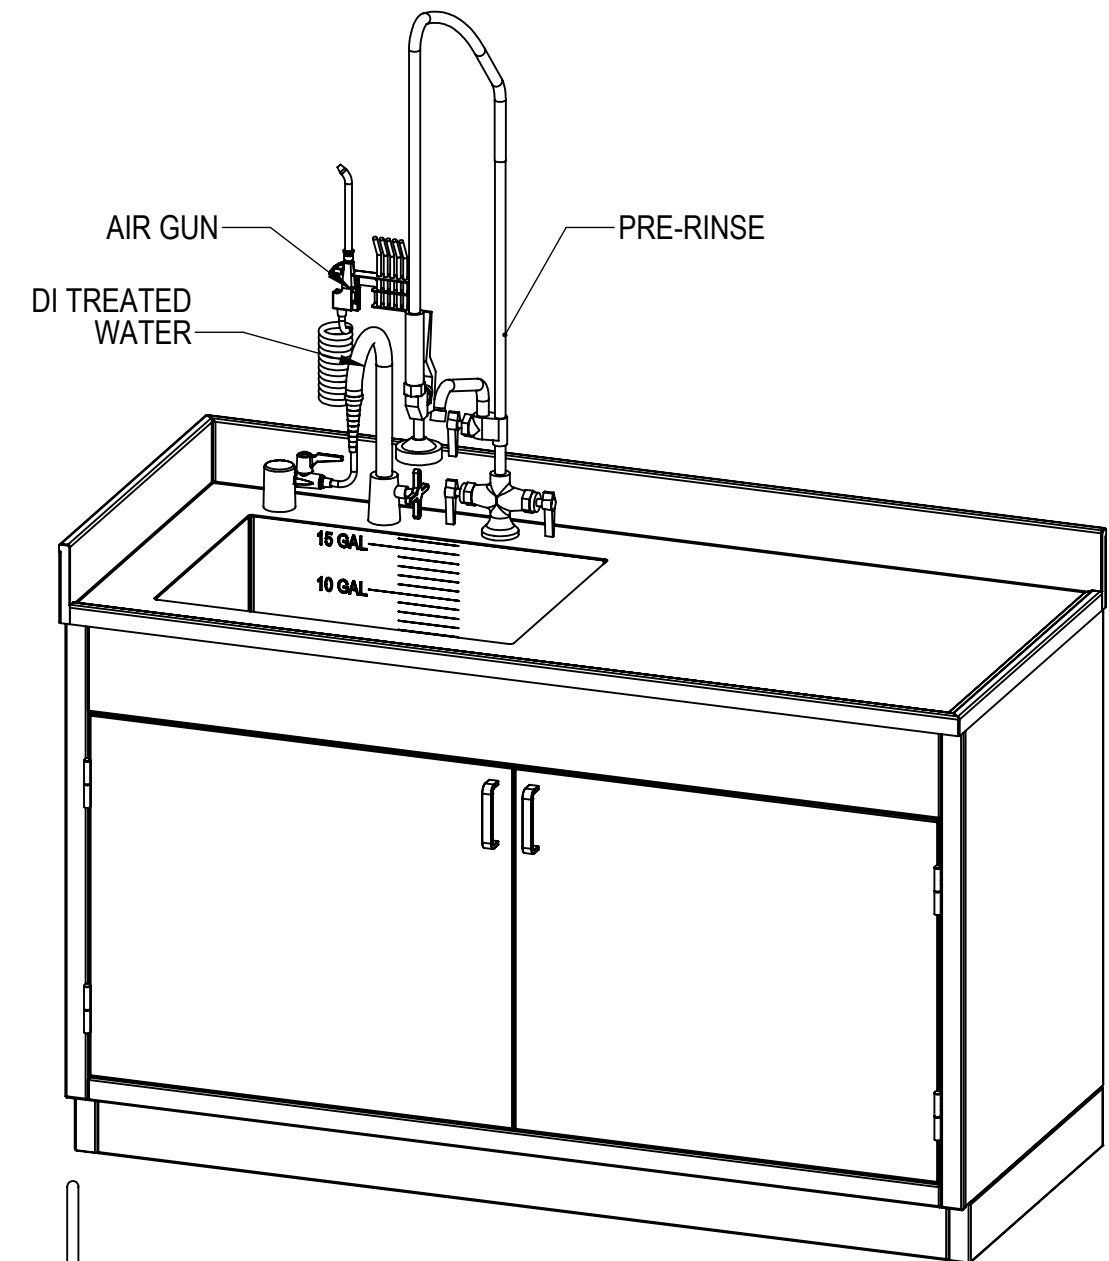

CHECK LOCAL CODES FOR LOCATION
MECHANICAL CONTRACTOR TO CONNECT TO EXISTING FLOOR OR WALL DRAIN IN ACCORDANCE WITH APPLICABLE LOCAL CODE STANDARDS.

RECOMMENDATIONS:

1. UTILITY CONNECTION: BRAIDED HOSES ARE USED, THEY NEED TO HAVE 12" TO 13" OF PLAY IN ORDER TO ALLOW SINK TO RAISE AND LOWER.
2. CHECK ALL LOCAL CODES.

- NOTES:
1. ALL CORNERS TO BE CLOSED AFTER FORMING
 2. MAX BURR HEIGHT .003"

TOLERANCES UNLESS OTHERWISE SPECIFIED
 ANGLES: ±1°
 DECIMALS: .XX = ± .030
 .XXX = ± .015
 .XXXX = ± .005
 FRACTIONS: ± 1/64



DRAWN BY	D. HEATH	DATE	01.28.15
CHECKED BY	A. SHAVAREBI	DATE	2/5/2015
APPROVED BY		DATE	
SCALE	1:12	SHEET	1 OF 1

AA	DESCRIPTION	ECO #	BY:	DATE
REV.				
REVISIONS				

WEIGHT (LBS)	263.70	THIRD ANGLE PROJECTION	INCHES	MATERIAL	FINISH
--------------	--------	------------------------	--------	----------	--------

TITLE: CABINET PROCESSING 26" X 60" X 37"

DRAWING NUMBER: FHCP266037-3-2-3-4

ANY PHYSICAL, DIMENSIONAL OR PERFORMANCE SPECIFICATIONS SHALL NOT BE REVISED WITHOUT WRITTEN AUTHORIZATION FROM MAC MEDICAL ENGINEERING

CONFIDENTIAL & PROPRIETARY TO FHC NOT TO BE COPIED OR SHOWN TO ANYONE WITHOUT THE EXPRESS PERMISSION OF FHC