
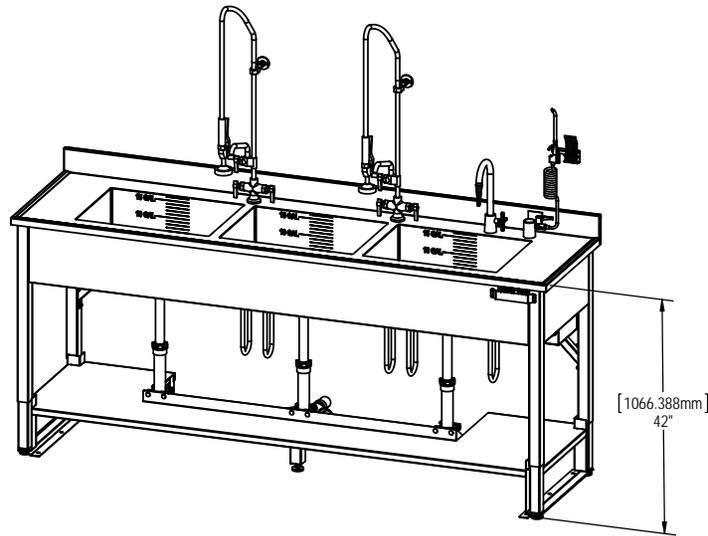


Design Approval - **ALL CUSTOM DESIGNS ARE NON-CANCELLABLE AND NON-RETURNABLE.** This endorsed approval drawing must be received in order to release your order for production. Manufacturer reserves the right to alter design to current manufacturing standards. By signing, you certify your approval in the following areas:

-Overall Dimensions -Hardware (fixtures, casters, accessories)
 -Material -Delivery Access (will it fit through doors)
 -Construction and Design -Facility Integration (rough in alignment, etc)

Approval Signature _____ Date: _____
 Print Name and Title _____
 (Signature, Date, Printed Name & Title are all required)

AAMI COMPLIANT FOR:
 HEIGHT
 SINK BOWL DEPTH

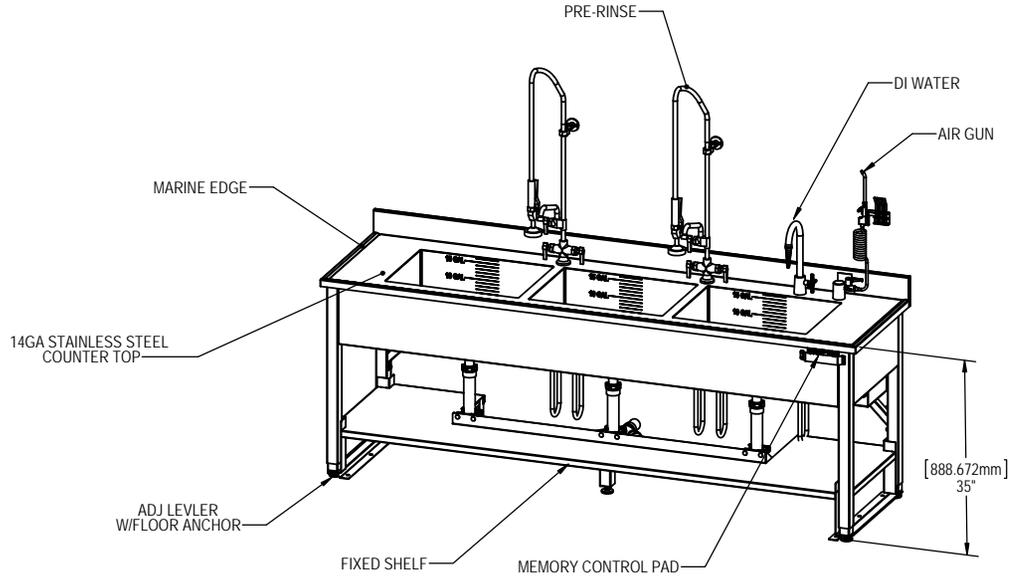

EXTENDED

- NOTES:
- 1) GOOSE NECK FAUCET
 INLET - 1/2" NPSM MALE WITH COMPRESSION FITTINGS
 OPERATING PRESSURE 20-125 PSI
 OPERATING TEMP RANGE 40-180 DEG. F
 - 2) UTILITY REQUIREMENT
 COLD WATER - 20 TO 50 PSIG 70 DEG. F MAX
 HOT WATER - 20 TO 50 PSIG 120 DEG. F TO 140 DEG. F
 - 3) SINK DRAIN: SINK OPENING DIA.: 2"
 NPS: 1-1/2"
 FACE FLANGE DIA.: 3"
 304 SERIES STAINLESS STEEL
 - 4) 304 SERIES STAINLESS STEEL
 - 5) WELDED CONSTRUCTION
 - 6) LINEAR UNIT: CONSISTING OF CYLINDER AND A LINEAR GUIDE.
 LOAD MAX 1,500 N PER CYLINDER
 LIFT LENGTH UP TO 300 MM (11.82")
 - 7) PUMP:
 MAX LOAD: 1,000 KG
 MAXIMUM LIFT SPEED WITH ELECTRIC MOTOR 30 MM/S (1.18"/S)
 - 8) ELECTRIC DRIVE:
 SYSTEM VOLTAGE: 230/110 VAC
 ENGINE VOLTAGE: 29 VDC
 NOMINAL RATING APPROX: 140VA
 NOMINAL SPEED 120 MIN-1
 OVERLOAD PROTECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED
 ANGLES: ±1°
 DECIMALS: .XX = ±.020
 FRACTIONS: 1/16 = ±.015
 XXXX = ±.005



DRAWN BY	D.QUALLS	DATE	5/13/16
CHECKED BY		DATE	
APPROVED BY		DATE	
SCALE	1:16	SHEET	1 OF 3



AA	RELEASE FOR CUSTOMER APPROVAL	ECO #	D.QUALLS	5/13/16
REV.	DESCRIPTION	ECO #	BY:	DATE
REVISIONS				

WEIGHT (LBS)	409.41	THIRD ANGLE PROJECTION	INCHES	MATERIAL	FINISH
TITLE	ADJ. HEIGHT PROCESSING TRIPLE SINK 26" X 96" X 35-42"				


DRAWING NUMBER
FHCPS269635-9-1-3-2

ANY PHYSICAL, DIMENSIONAL OR PERFORMANCE SPECIFICATIONS SHALL NOT BE REVISED WITHOUT WRITTEN AUTHORIZATION FROM MAC MEDICAL ENGINEERING

CONFIDENTIAL & PROPRIETARY TO FHC. NOT TO BE COPIED OR SHOWN TO ANYONE WITHOUT THE EXPRESS PERMISSION OF FHC

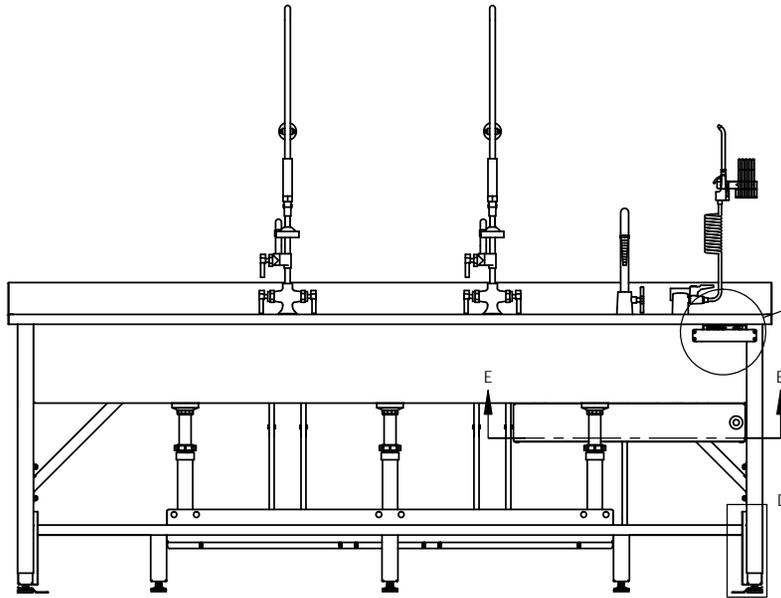

DETAIL C
SCALE 1 : 8
MEMORY CONTROL PAD
W/FOUR PRE-SET
MEMORY CONTROL

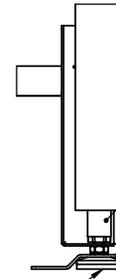


DETAIL D
SCALE 1 : 4
LINEAR UNIT WITH CYLINDER
RUBBER ADJ. LEVLER

SUGGESTED OUTLET
LOCATION. CHECK YOU
LOCAL BUILDING CODES
BEFORE INSTALLING

X
[457.200mm]
18"
[60.325mm]
2 3/8"


MECHANICAL CONTRACTOR TO
CONNECT TO EXISTING FLOOR
OR WALL DRAIN IN ACCORDANCE
WITH APPLICABLE LOCAL CODE
STANDARDS

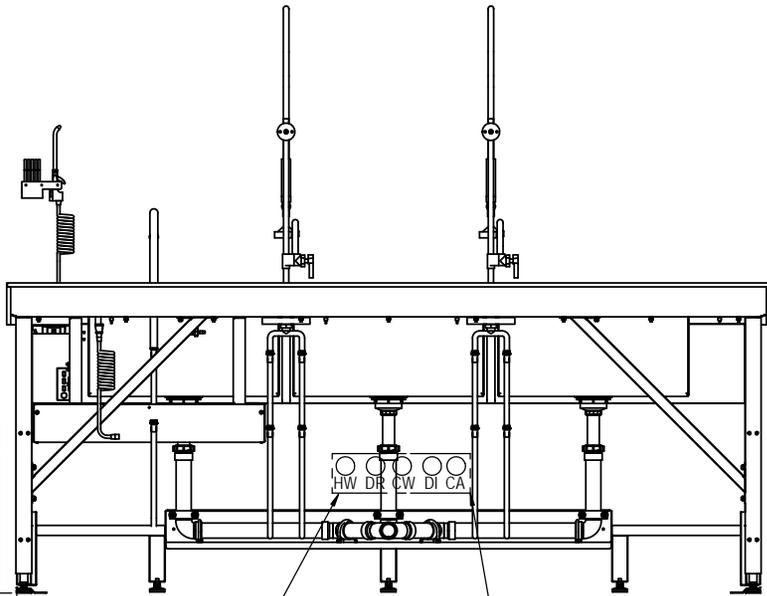

HW DR CW DI CA

CHECK LOCAL CODES
FOR LOCATION

POWER CORD LOCATION

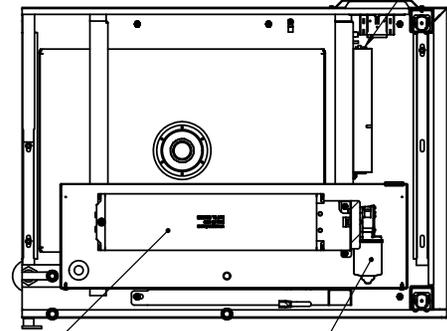

PUMP W/COVER
ELECTRIC MOTOR

SECTION E-E
SCALE 1 : 8

RECOMMENDATIONS:

1. UTILITY CONNECTIONS: BRAIDED HOSES ARE USED
THEY NEED TO HAVE 12" TO 13" OF PLAY IN ORDER TO
ALLOW THE SINK TO RAISE AND LOWER.
2. CHECK ALL LOCAL CODES.

WEIGHT (LBS) 409.41	THIRD ANGLE PROJECTION	INCHES	MATERIAL	FINISH
------------------------	---------------------------	--------	----------	--------

TITLE
ADJ. HEIGHT PROCESSING TRIPLE SINK 26" X 96" X 35-42"

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ANGLES: ±1°	DECIMALS: .XXX = ±.003
FRACTIONS: ±1/64	XXX = ±.015
	XXXX = ±.005

	DRAWN BY	DATE
	CHECKED BY	DATE
	APPROVED BY	DATE
	SCALE	SHEET

DRAWING NUMBER
FHCPS269635-9-1-3-2

ANY PHYSICAL, DIMENSIONAL OR PERFORMANCE SPECIFICATIONS SHALL NOT BE REVISED WITHOUT WRITTEN AUTHORIZATION FROM MAC MEDICAL ENGINEERING

CONFIDENTIAL & PROPRIETARY TO FHC. NOT TO BE COPIED OR SHOWN
TO ANYONE WITHOUT THE EXPRESS PERMISSION OF FHC